



G4 GEMINI SATELLITE COFFEE BREWERS WITH INTELLIFRESH®

MODELS: G4GEMSIF63A1000, G4GEMTIF10A1000
G4GEMSIF63B1000, G4GEMTIF10B1000



G4GEMSIF63A1000
Single 1.5 Gallon IntelliFresh® Coffee Brewer
(Stainless Steel, Dual Voltage)



G4GEMTIF10A1000
Twin 1.5 Gallon IntelliFresh® Coffee Brewer
(Stainless Steel)



G4GEMSIF63B1000
Single 1.5 Gallon IntelliFresh® Coffee Brewer
(Black Powder Coated, Dual Voltage)



G4GEMTIF10B1000
Twin 1.5 Gallon IntelliFresh® Coffee Brewer
(Black Powder Coated)

PERFECT HEAT, PERFECT TIMING, PERFECT BREW.

G4 Technology with IntelliFresh® delivers advancements to make brewing and dispensing of hot, fresh, gourmet coffee and tea even easier. Its simple, intuitive, icon-driven interface includes features that simplify brewing operations, provide fast and intuitive training and reduce service calls and cost.

With a wide selection of features and programming flexibility, Curtis has taken coffee brewing technology to a new heights with the Generation Four Brewing Systems.

ITEM NO

PROJECT

DATE

G4 TECHNOLOGY FEATURES

- Large, 4.3" touch screen.
- Icon-driven interface streamlines and simplifies operation.
- Real time feedback of the brewing process helps eliminate user error.
- Built-in self diagnostics alert operator of system failure and when preventive maintenance is needed.
- Energy-saving mode is easily customized to specific operator needs and applications.
- Patented G4 digital controller used in multiple Curtis brewing systems, reducing parts inventory.


SATELLITE FEATURES

- LED notification of freshness timing.
- PID (Proportional Integral Derivative) IntelliFresh technology ensures consistent temperature in satellites regardless of time and volume.
- **Water Resistant** — Can be immersed without compromising the electronic control board.
- Water-safe and a large top opening to allow for ease of cleaning.
- **Quality Timer and Temperature** — Factory set, but adjustable from the brewer's controller without opening the satellite cabinet.
- Move satellites to a remote warmer decks without affecting the Quality Timer.


MINERAL TOLERANT DESIGN

- **AFS (Advanced Flow Sprayhead)** — Prevents lime particles from impeding water flow through the sprayhead while immediately flooding the grounds.
- Fully digital temperature sensor located outside of the water tank (no water contact).
- **Water Tanks** — Reverse-Osmosis-Water (RO) bathed and silver soldered welds for increased scale and corrosion resistance.
- **PM Notification Display** — Water error code if interruption in water flow occurs.
- **Mineral Sensing Technology** — Notifies user of scale build up.
- Holds coffee at precise, pre-determined temperature with little or no variation.

**G4GEMSIF63A1000/
G4GEMSIF63B1000**
(Single Coffee Brewers)

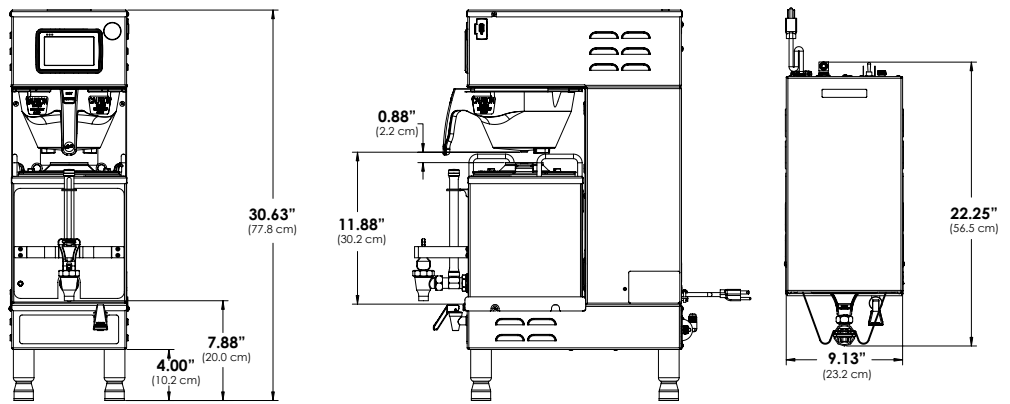

**G4GEMTIF10A1000/
G4GEMTIF10B1000**
(Twin Coffee Brewers)

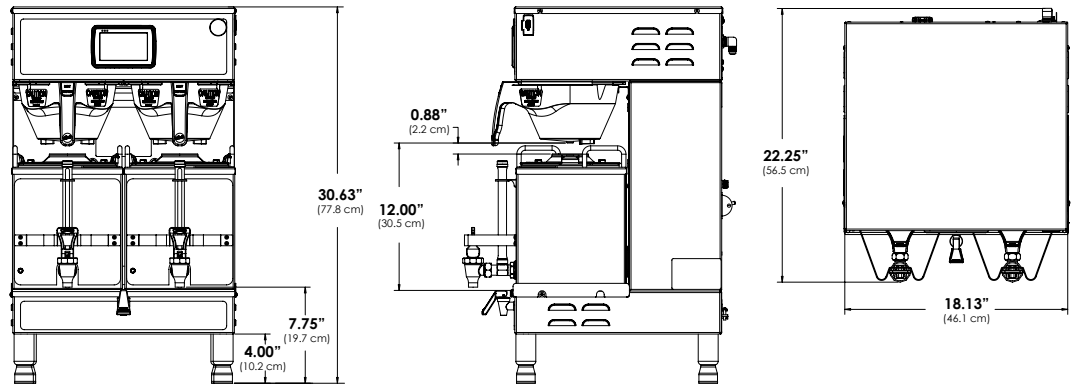

BREWER SPECIFICATIONS

MODEL #	DIMENSIONS (H x W x D)	PHASE	VOLTS	AMPS	WIRE	WATTS	HERTZ	GAL/HR	WATER CONNECTOR	SHIP WEIGHT	SHIP CUBE
G4GEMSIF63A1000	30.63" x 9.13" x 22.25"	1 PH	120/220V	15.0/12.7A	3W+G	1800/3300W	50/60 Hz	4.5/7.5	3/8" Flare	50.0 lbs.	6.7 cu. ft.
G4GEMTIF10A1000	30.63" x 18.13" x 22.25"	1 PH	220V	23.6/35.4A	3W+G	5200/7600W	50/60 Hz	15.0/21.0	3/8" Flare	85.0 lbs.	10.9 cu. ft.
G4GEMSIF63B1000	30.63" x 9.13" x 22.25"	1 PH	120/220V	15.0/12.7A	3W+G	1800/3300W	50/60 Hz	4.5/7.5	3/8" Flare	50.0 lbs.	6.7 cu. ft.
G4GEMTIF10B1000	30.63" x 18.13" x 22.25"	1 PH	220V	23.6/35.4A	3W+G	5200/7600W	50/60 Hz	15.0/21.0	3/8" Flare	85.0 lbs.	10.9 cu. ft.

DISPENSER AND REMOTE WARMER STANDS



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov



WILBUR CURTIS CO., INC
6913 Acco Street, Montebello, CA 90640-5403
Telephone: 800-421-6150 · 323-837-2300
Fax: 323-837-2406
www.wilburcurtis.com

